





REV.	ECN. NO.	DESCRIPTION	APR.	DATE
1.0		FIRST RELEASE		2020.08.18

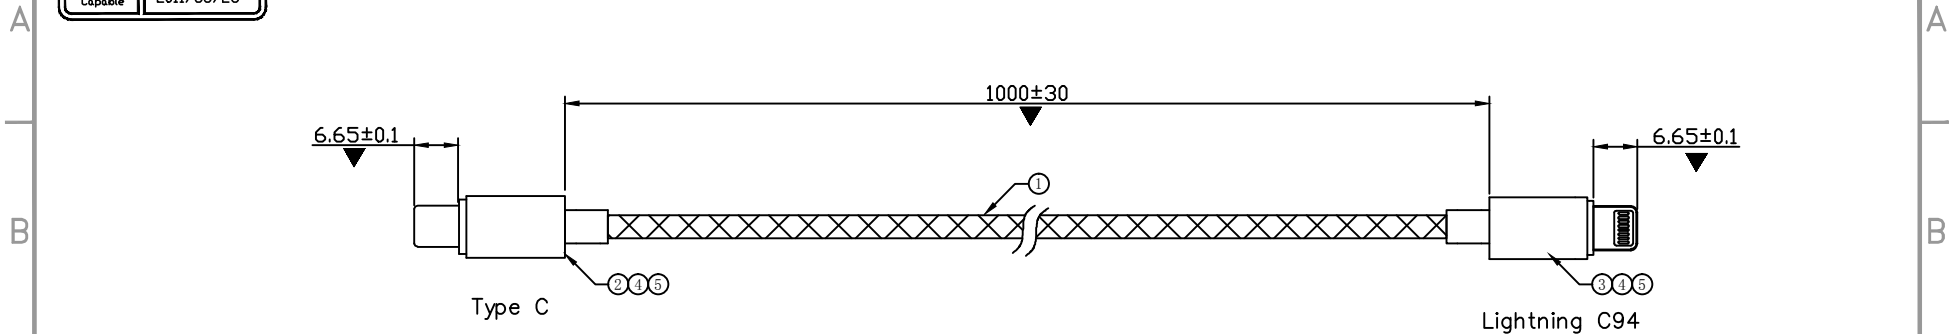

包装后的产品厚度不能超过17mm

- 红55\*0 1
- 蓝0 1T\*10
- 绿0 1\*10
- 外被编织 OD 3 8
- 白0 1\*10
- 黑55\*0 1

Type C	WIRE	Lightning C94
铁壳		
- G	黑色	-
D+	绿色	D+
D-	白色	D-
CC	蓝色	CC
+ V	红色	+

认证拉伸款  
焊点以印字为准

C94增加延长板并点焊马口铁  
充电传输功能

ELECTRONIC TEST:

- ALL CABLE 100% TEST, OPEN, SHORT, MISS WIRE
- CONDUCT RESISTANCE: 3 ohm Max
- INSULATION RESISTANCE: 5M ohm Min
- HI-POT: 300V DC, 10ms
- DIMENSIONS MARK "▼" SHOULD BE CHECKED;

NO.	Material	Specification	QTY	UNIT
6	胶圈	黑色橡胶圈 15mm W=4MM	1	PCS
5	CASE	深灰色铝壳	2	PCS
4	OVERMOLD	45P 黑色 PVC	A/R	G
3	CONN.2	苹果端子带IC Lightning C94	1	PCS
2	CONN.1	USB3.1 CM Connector With 3.1 PCB, Pin GOLD Plated, Shell NICKEL Plated,	1	PCS
1	CABLE	(55/0.1TC)*2C+(10/0.1TC)*3C+S PVC+黑灰PP纱编织网, OD 3.8±0.15	A/R	MM

TOLERANCE UNLESS OTHERWISE SPECIFIED			
.X± 0.35	X.*± 1.5°	APR.	TITLE: USB C Type to Lightning Cable(MFI) L=1000MM
.XX± 0.25	.X*± 1.0°	CHK.	DWG NO. R000284
.XXX± 0.15	.XX*± 0.5°	DRA.	UNITS: MM
		PROJ.	SHEET: 1/1
		CUSTOMER DRAWING	
		SCALE NO SHEET REV. 1.0	